


## AIO OVERHEAD SHOWER CP

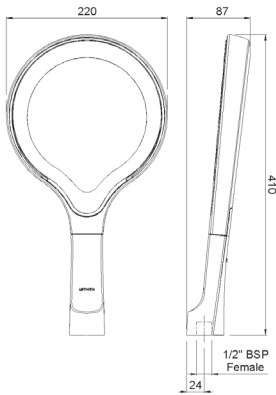

**CONSTRUCTION:** ABS

**SUPPLY:** Suitable for high pressure only

**INLET CONNECTIONS:** 1/2" BSP

**WORKING PRESSURES:** 1.0 - 5.0 bar

**CARTRIDGE/VALVE TYPE:** N/A

- Limescale resistant - hydrophobic properties resists the build up of limescale
- Water efficient without compromising performance
- Rotary ceramic diverter cartridge for smooth operation
- Quick fit connector for easy installation
- Comes complete with 15mm (1/2" BSP) threaded connection
- Fitted with 12 l/min flow regulator
- Twin with a Kaha or Kiri single outlet shower valve

**AOOSCPUK**

**Open Outlet Flow** (Bar - l/min)

<b>BAR</b>	0.3	0.5	1.0	2.0	3.0	4.0	5.0
<b>HANDBOOK FLOW</b>	N/A	N/A	9.1	10.1	10.2	11	11.3

**Chrome**



1604044



\$" " +) \$%



Please Note: Flow rate will be dictated by installation configurations.  
 Please ensure to check the appropriate flow restrictor information if applicable.  
 \*Please refer to website for full warranty details.

**FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM**

[methven.com](http://methven.com)

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.