

# SOQ2 SHCAR C

## SONIQUE Shower Range Sonique2 Thermostatic Recessed Shower Valve with Adjustable Riser Chrome



### Features:

- 15mm inlet connections
- 152mm inlet centres
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 1 x 7L/min and 1 x 5L/min flow regulators

### Product Certifications:




WRAS Cert. Number: 1404020  
WRAS Expiry Date: 30/04/2019



TMV2 Cert. Number: NSF2124/0619  
TMV2 Expiry Date: 13/06/2024


For more products, visit our website:  
<http://www.bristan.com>



### Specification

|  |                            |
|--|----------------------------|
| Style:                                   | Contemporary               |
| Finish/Colour:                           | Chrome                     |
| Main Construction Material:              | Brass                      |
| No of Controls:                          | 1                          |
| Shower Type:                             | Thermostatic               |
| Shower Head Type:                        | Adjustable                 |
| Valve/Cartridge Type:                    | Recessed                   |
| Maximum Hot Water Supply Temperature °C: | 80                         |
| Maximum Static Pressure: (bar)           | 10                         |
| Plumbing System Suitability:             | All - Ideally Balanced     |
| Working Pressure Range:                  | Min. 0.1 Bar - Max 5.0 Bar |
| Connection Inlet:                        | 15mm Compressions          |
| Connection Outlet:                       | G 1/2"                     |

### Dimensions (measurements in mm)

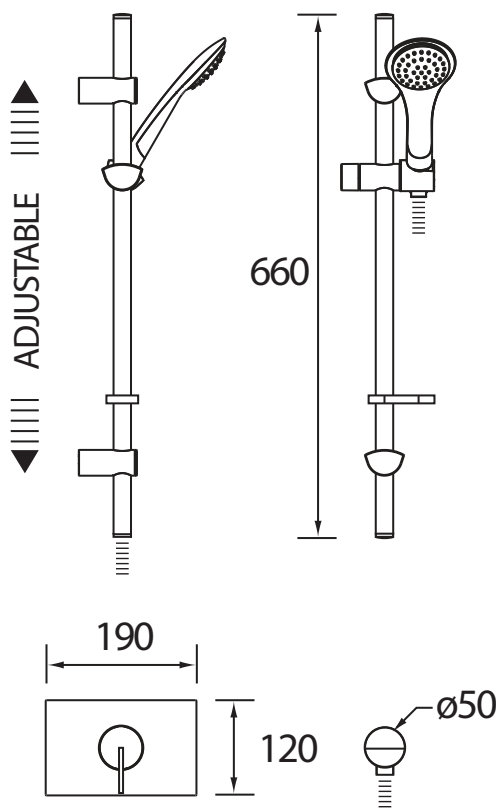

### Flow Rates (l/min)

| System Pressure (bar)   | 0.2 | 0.5  | 1     | 2    | 3     | 5     |
|-------------------------|-----|------|-------|------|-------|-------|
| With Flow Regulators    | --  | --   | 7.3   | 8    | 8.7   | 9.2   |
| Without Flow Regulators | 9   | 15.6 | 22.06 | 31.2 | 38.12 | 49.33 |

# TECHNICAL DATA SHEET



# BRISTAN