DUL BF C

DU LEVER Tap Range Design Utility Lever Bath Filler Chrome



Specification					
Product Type:	Bathroom Tap				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Lever				
Connection Inlet:	3/4"BSP				
Connection Outlet:	M24 Flow Straightener				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- 3/4" valve

Product Certifications:




WRAS Certificate No: 1707002 WRAS Expiry Date: 31/07/2022

For more products, visit our website:



Dimensions (measurements in mm)

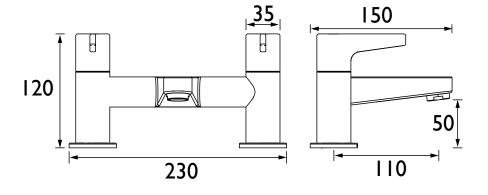

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
DUL BF C (mixed)	17.2	29.8	43.3	62.1	76	98.1		

TECHNICAL DATA SHEET



