SAI 4HBSM C

SAIL Tap Range Sail 4 Hole Bath Shower Mixer Chrome



Specification				
Product Type:	Bath shower mixer			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	1/2" Flexi Tails			
Connection Outlet:	M24 Anti-Splash			
Number of Tap Holes:	4			
Valve/Cartridge Type:	1/2" Ceramic Disc Valves -1/4 Turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	1.5 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Flexible tails included
- Minimum working pressure of
 1.5 bar


Product Certifications:



For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

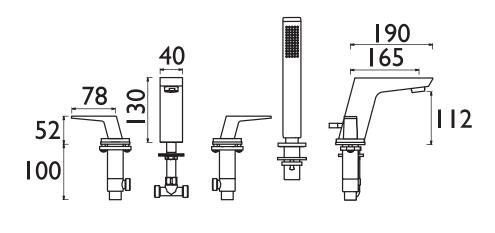

Flow Rates (I/min)					
System Pressure (bar)	1.5	2	3	5	
Through Bath Filler (mixed)	18.4	21.2	26	33.6	
Through Handset (mixed)	12	13.9	17	21.9	

TECHNICAL DATA SHEET



